

# WS28-2

**WATER SPRINKLER**



- Top Performance
- Enhanced Productivity
- Increased Reliability
- Excellent Serviceability
- Exceptional Manoeuvrability
- Superior Operating Comfort
- Improved Safety



Flywheel power (net) : 280 kW (375 hp) @ 2100 rpm

Capacity : 28,000 Litres

[www.bemlindia.com](http://www.bemlindia.com)

# WS28-2

**WATER  
SPRINKLER**

## Salient Features :

### **Top Performance :**

High power engine, rugged AVTEC CLT 754 transmission with automatic lock - up clutch and heavy duty planetary axle provide optimum combination of speed and tractive effort. Pressurised discharged through sprinkling nozzles & higher spreading width for effective dust settling is assisted by hyd. Motor & centrifugal pump.

### **Enhanced Productivity :**

High power to weight ratio gives ample reserve power for faster cycle time. Larger tank capacity ensures high productivity.

### **Increased Reliability :**

Adjustment-free wet multiple disc brakes for rear axle and dry caliper disc brakes for front axle offer longer life.

### **Excellent Serviceability :**

Low maintainability and repairability index, evaluated through SAEJ817A, compared to any other dumper in its class.

### **Exceptional Manoeuvrability :**

Orbitrol full time Power steering with a good combination of steering angle, shorter turning radius, wheel tread and wheel base provide high degree of manoeuvrability.

### **Superior Operating Comfort :**

Human-engineered cabin with ergonomically designed operator's compartment & controls offer maximum comfort and operational ease.

### **Improved Safety :**

Features include Integral ROPS cabin, emergency steering, dual braking system to meet relevant safety standards.



## **ENGINE**

Make	BEML
Type	BS6D140-1
	IC-Diesel, 4-stroke turbo charged, direct injection, water cooled.
Number of cylinders	6, inline
Bore & Stroke (mm)	ø 140 x 165 mm
Displacement	15.24 l
Fly wheel power	280 kW (375 hp) @ 2100 rpm
Maximum net torque	1627 N-m (166 kgm) @ 1400 rpm
<b>Meets SAE J 1349</b>	
<b>Electricals</b>	
Starting motor	24V DC, 7.5 kW
Battery	2 x 12V, 200Ah
Alternator	24 V 80A

## **POWER TRAIN**

<b>Transmission</b>					
Model	AVTEC CLT 754				
Type	Power shift with automatic Lock up clutch				
Drive axle	Full floating				
<b>Differential</b>					
Type	Traction sensing, automatic				
Ratio	3.23 : 1				
<b>Final Drive</b>					
Type	Planetary reduction type				
Ratio	4.58 : 1				
Total reduction	14.787 : 1				
<b>Travel speeds (km/h)</b>					
Range	1st	2nd	3rd	4th	5th
Forward	7.74	12.57	19.85	29.06	40.11
Reverse	3.94				

## **HYDRAULIC SYSTEM**

<b>Hydraulic pump</b>	
Type	One no. tandem gear pump for hoist, steering and brake oil cooling
Capacity	213 l/min @ 2100 rpm (Hoist & Steering) 70 l/min @ 2100 rpm (Brake oil cooler)
<b>Relief pressure</b>	
Motor	12.7 MPa (130 kg/cm <sup>2</sup> )
Brake oil cooler	0.54 MPa (5.5 kg/cm <sup>2</sup> )
<b>Hydraulic Motor</b>	
Type	Vane Type
Power (Max.)	27 kW (36 hp) @ 12.7 MPa (130 kg/cm <sup>2</sup> )
Speed	2900 rpm @ 128 l/min

## **STANDARD EQUIPMENT**

**GENERAL :** ROPS cabin, Electric Diagnostic system, Vandalism Protection Cap (Fuel tank), Head and tail lights, Air horn, Turn signal lights, Alternator, Electric starter, Key-switch, Wiper motor, Manual emergency steering, Windshield washer, Right & Left Hand mirror, Portable fire extinguisher, Tool kit, Parking brake valve, Tilttable steering wheel and column, Exhaust muffler, Central warning lamp & buzzer, Battery relay, Backup Alarm with flasher, Catwalk, Mudflaps, Rock ejectors, Cabin floor mat, Safety seat belt, Co-operator seat, Air dryer, Front brake cut-off switch, Emergency brake, Engine shut-off switch, Twin fresh air fans, Fog lights, Dial guage on fuel tank, Auto retarder, Blind spot mirror & steering locking, Reflective stickers on all sides.

**GUAGES :** Ammeter, Voltmeter, Air pressure, Engine oil pressure, Water temperature, Transmission oil temperature & pressure, Brake oil temperature, Air cleaner restriction, Speedometer, Tacho-meter, Electrical hour meter, Fuel level.

**INDICATORS :** Hi-beam, Reverse, Turn signal, Lube oil pressure, Water temperature, Parking brake and emergency steering "ON", Alternator warning, Transmission Oil temperature and pressure, Fuel level, Transmission filter clogging, Air pressure and hydraulic oil temperature, Electronic water level indicator for water tank.

**ALARMS :** Air pressure, Water temperature, Transmission oil temperature & pressure, Lube oil pressure, Hydraulic oil temperature, Transmission filter clogging and parking brake "ON", Low fuel level.

## **OPTIONAL ACCESSORIES**

Tyre inflation kit, Suspension charging kit, Auto emergency steering, Air conditioner and Heater unit, Fast fill system for fuel, Automatic centralised lubrication system, Parking brake interlock, Radial tyres, Auto fire suppression system, front pressurised sprinkling, full fledged fire fighting through monitor.

## SUSPENSION

Type-front	Frame mounted, hydropneumatic integral rebound control	
Rear	Axle mounted, inverted hydropneumatic, Integral rebound control	
<b>Cylinder</b>	<b>Front</b>	<b>Rear</b>
Quantity	2 nos	2 nos
Bore x Stroke	∅ 216 x 365 mm	∅ 216 x 170 mm
Charging pressure	2.8 MPa (28.12 kg/cm <sup>2</sup> )	1.9 MPa (19.5 kg/cm <sup>2</sup> )
<b>Load/deflection Rate</b>		
Empty	482 kg/cm	408 kg/cm
Loaded	1132 kg/cm	5504 kg/cm

## STEERING SYSTEM

Type	Orbitrol, full time power steering
<b>Cylinder</b>	
Type	Double acting, piston type
Quantity	Two
Bore x Stroke	∅ 110 x 435 mm
Relief pressure	12.4 Mpa (126 kg/cm <sup>2</sup> )
<b>Emergency Steering</b>	Electrically driven hydraulic Pump and motor
<b>Performance</b>	
Turning radius	8.75 m
Vehicle clearance Dia	18.18 m

## BRAKES

<b>Service Brakes</b>	
Front	Air-over-hydraulic, dry caliper disc
Rear	Air-over-hydraulic, wet multiple disc
Emergency	Air-over-hydraulic, automatic application through relay emergency valves
<b>Parking brake</b>	Spring actuated, air released, dry caliper disc on axle input flange
<b>Retarder brakes</b>	Rear brake serves as retarder brake
Meets ISO 3450 performance requirements	

## TYRES

Size	18.00 x 25, 32PR (E-4) tubeless - standard
(Front & Rear)	18.00 x 25, 36 PR (E-4) tubeless - optional
	18.00 x 25, 40 PR (E-4) tubeless - optional
Rim size	13.00 x 25

BEML recommends the user to evaluate all job conditions and consult the tyre, manufacturer to make proper tyre selection.


## SYSTEM REFILL CAPACITIES

Systems	Capacity (l)
Cooling system	120
Fuel tank	540
Engine lub. oil	26
Transmission	36
Differential	45
Final drive (each side)	18
Hydraulic tank	225
Air tanks	150
Water tank	28,000
Suspension	- Front 17
	- Rear 8.8

## FRAME

<b>Type</b>	Box section construction made of high tensile strength steel
-------------	--

All dimensions are in mm

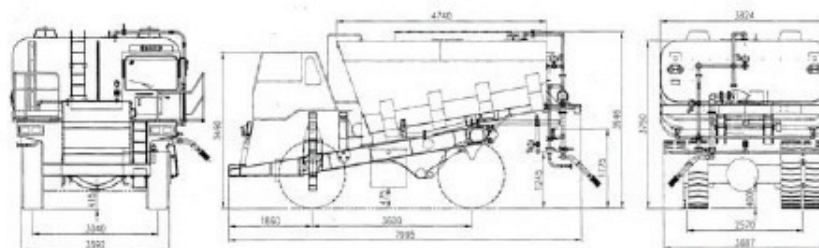

NOTE: Material and specifications are subject to change without notice, Illustrations may include optional equipment & accessories

## TANK

**Construction:** All welded reinforced, 6mm thick steel plates. Cross baffles to avoid heavy surging.

**Interior Coating:** Coated with Special Anti Corrosive paint.


## CABIN

**Type** Sound suppressed, Integral ROPS cabin with electronic Diagnostic system  
Meets ROPS performance criteria as per ISO 3471

## MASS

Net vehicle mass	25,700 kg	
Water Weight	28,000 kg	
Gross vehicle mass	53,700 kg	
<b>Mass distribution</b>	<b>Empty</b>	<b>Loaded</b>
Front axle, kg	12,079(47%)	17,721(33%)
Rear axle, kg	13,621(53%)	35,979(67%)

## PERFORMANCE CHART

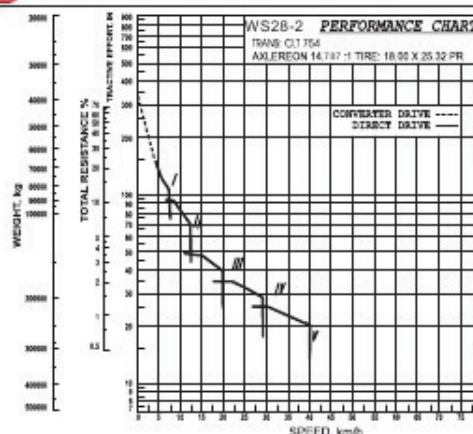

**How to use this chart:** Draw a straight line from gross vehicle mass to percent of total resistance (total resistance = grade resistance + rolling resistance) and extend the same line upto tractive effort. From this point draw horizontally to the curve with the highest obtainable gear, then vertically down to obtain maximum speed.

## WATER SYSTEM

<b>Water Pump</b>	
Type	Centrifugal Pump
Capacity	110 m <sup>3</sup> /Hr@2900 rpm & 55 m Head
Drive	Hydraulic motor through flexible coupling
<b>Piping</b>	
Suction	80mm
Discharge	50mm
Valves	Butterfly type
<b>Sprinkling</b>	
Pressurised Sprinkling	Constant Sprinkling velocity Maintained by a Centrifugal pump
Spreading width	14 m
Gravity Sprinkling	Through perforated manifold connected to Tank Bottom
Nozzles	Fish tail type
Self filling	By connecting the pump suction to out side Reservoir or pond through armoured hose with foot valve unit
Fire fighting Unit	Quick connecting adaptor provided for fire fighting with canvas hose & triple purpose nozzle.

बी ई एम एल लिमिटेड

**BEML LIMITED**

A Govt. of India Miniratna Company Under Ministry of Defence

**Business Network**

**Corporate Office**

BEML Soudha, 23/1, 4th Main,  
S.R. Nagar, Bangalore-560 027

T + 91 80 22963240, 22963250

F + 91 80 22963278/516/280/164

E-mail: office@cpd.beml.co.in  
office@pr.beml.co.in

**International Business Division**

BEML Soudha, 23/1, 4th Main,  
S.R. Nagar, Bangalore-560 027

T + 91 80 22222730, 22233350  
22963187, 22963215

F + 91 80 22224874

E-mail: office@export.beml.co.in

**Marketing Division**

5th Floor, Unity Building,  
J.C. Road, Bangalore-560 002

T + 91 80 22963501/02/07/510/553

F + 91 80 22963541

E-mail: m@beml.co.in  
bemldealer@dealer.beml.co.in

**REGIONAL OFFICES**

**Bangalore**

No -23/1, Haudin Road,  
Ulsoor, Bangalore 560008  
Karnataka

T + 91-80-22963590/92/93/94  
F + 91-80-2558156  
E-mail: mgbangro@gmail.com

**Bilaspur**

1/A, Sector-C, Sirgitti Industrial Area,  
P.O: Tifra, Bilaspur - 495 223.  
Chhattisgarh

T + 91-7752-252745, 252598  
F + 91-7752 252065  
E-mail: bilaspur@rm.beml.co.in

**Neyveli**

F-4, Rajendraprasad Road, Block-27  
Neyveli - 607 803. Tamil Nadu

T/F + 91 4142 268517  
E-mail: neyveli@rm.beml.co.in

**Dhanbad**

Mouza-Kangalo, Amaghata,  
Govindpur Post, Dhanbad,  
Jharkand-828 109

T + 91 326 2227089 / 38 / 85  
F + 91 326 2227082  
E-mail: dhanbad@rm.beml.co.in

**Hyderabad**

3-6-114, Himayat Nagar,  
Hyderabad - 500 029  
Andhra Pradesh

T + 91 40 23225250 / 7032 / 2166  
F + 91 40 23221794  
E-mail: hyderabad@rm.beml.co.in

**Kolkata**

35/1, Taratalla Road,  
Kolkata - 700 088.  
West Bengal

T + 91 33 24015286 / 87 / 98 / 99  
F + 91 33 24015288  
E-mail: kolkata@rm.beml.co.in

**Mumbai**

C/o Richardson & Cruddas (1972) Ltd.  
3rd Floor, Corporate Office Building  
Sir J.J Road Byculla. Mumbai -400 008

T + 91 22 23781457 / 23781382  
F + 91 22 23780915  
E-mail: mumbai@rm.beml.co.in

**Nagpur**

33, Cement Road,  
Shivaji Nagar,  
Nagpur - 440 010. Maharashtra.

T + 91 0712 2248435 / 2248343  
F + 91 0712 2249997  
E-mail: nagpur@rm.beml.co.in

**New Delhi**

Flat EFGH, "Vandana", 11th Floor,  
Tolstoy Marg, Cannought Palace,  
New Delhi - 110 001

T + 91 11 23310035 / 23316500  
F + 91 11 23325085  
E-mail: delhi@rm.beml.co.in

**Ranchi**

206/D-1, Bhagirathi, (Behind NCC Campus)  
Rameshwaram Colony, Bariatu Road,  
Ranchi. Jharkhand - 834009

T + 91 651 2540710 / 2540791  
F + 91 651 2540624  
E-mail: ranchi@rm.beml.co.in

**Sambalpur**

BEML Complex, NH-6, Panchagachhia,  
Baraipalli Post, Sambalpur 768 006  
Orissa.

T + 91 663 2521604 / 2520393  
F + 91 663 2521603  
E-mail: sambalpur@rm.beml.co.in

**Singrauli**

PB No. 5, Jhingurda Colliery,  
Sidhi, Singrauli - 486 889  
Madhya Pradesh.

T + 91 7805 268260 / 266668  
F + 91 7805 267282 / 318  
E-mail: singrauli@rm.beml.co.in

**ACTIVITY CENTERS**

**Bhopal**

Ground Floor, Hall No.1, Chittoor Complex, Zone-1,  
Maharanapratap Nagar (MP Nagar), Bhopal - 462 011

T + 91 755 2550711  
E-mail: bemlbhopal@gmail.com

**Goa**

BEML Limited 5/4, Victor Building, Fontanhas, Mala,  
Panjim - 403 001

T + 91 8322420380, F+91 832225135  
E-mail: goa@rm.beml.co.in

**Itanagar**

C/o Tobom Riba Building, H-Sector, Near Arunodaya  
High Secondary School, Itanagar-791113  
Dist: Papum Pare, Arunachal Pradesh

T + 91 9402934205  
+ 91 8837215852  
E-mail: vishwakantkumar@gmail.com

**Kochi**

No. 39/2122, Chittoor Road, Ernakulam South,  
Kochi-682 016

T + 91 484 2375138  
E-mail: bemlkoichi@gmail.com

**Madurai**

9-4/49, Kalai Nagar, IInd Main Road  
Madurai - 625 017

T/F + 91 452 2649458  
E-mail: madurai@rm.beml.co.in

**Maihar**

Mr. Srinivas M, Maihar, Satna, Madhya Pradesh

Mob: +91 7987553768

**Vishakhapatnam**

No. 8-45-11, 4h Lane, China Waltair Colony  
Vishakhapatnam - 530 003

T/F 0891 2754608  
E-mail: vizag@rm.beml.co.in

**DISTRICT OFFICES**

**Ahmedabad**

266-1, Dilbaug Villa, Darshan Society Road  
Navrangpura, Ahmedabad - 380 009  
Gujarat

T + 91 79 26445523 / 64  
F + 91 79 26423950  
E-mail: ahmedabad@rm.beml.co.in

**Asansol**

3, Bumpur Road,  
Asansol - 713 304  
West Bengal

T + 91 341 2252480  
F + 91 341 2250601  
E-mail: asansol@rm.beml.co.in

**Bacheli**

Behind Central Stores of NMDC Ltd.,  
Depot 5, Bacheli - 494 553.  
Chhattisgarh

T + 91 7857 200518  
T/F + 91 7857 230005  
E-mail: bemlbacheli@gmail.com

**Bhilai**

Room no 22/C, BSP Expansion Building,  
Near Ispat Bhaven, Bhilai 490 001  
Chhattisgarh

T + 91 788 2223880  
F + 91 788 2221652  
E-mail: mnboffice@beml.co.in

**Bhubaneswar**

252/A, LEWIS Road  
Bhubaneswar - 751 014  
Orissa

T + 91 674 2434428  
T/F + 91 674 2434427  
E-mail: mbb@beml.co.in

**Chandrapur**

Mamidwar, Tiles Factory Compound  
Ghugus Road, Padoli  
Chandrapur - 442 406 Maharashtra

T + 91 7172 287230  
F + 91 7172 287072  
E-mail: bemlchandrapur@gmail.com

**Chennai**

Flat No. 10&11, Supriya Estates,  
Sterling Road, Nungambakkam,  
Chennai - 600 034, Tamil Nadu,

T + 91 44 28220844 / 28276576  
F + 91 44 28257319  
E-mail: ma@rm.beml.co.in

**Guwahati**

No. 11, Ward 43, Hengrabari Road,  
Ganesh Puri, Dispur,  
Guwahati - 781 006 Assam

T + 91 361 2232966  
F + 91 361 2232967  
E-mail: guwahati@rm.beml.co.in

**Hospet**

No. 1431, Manjunatha Complex, New Ward No.31  
Bhagat Singh Nagar, Opp. KSSIDC Indl. Estate,  
Dam Road, Hospet - 583 203, Karnataka

T + 91 8394 230173  
F + 91 8394 230172  
E-mail: bemlhospet@gmail.com

**Jammu**

62C, Block D/C, Gandhi Nagar,  
Jammu tawi -180 004  
Jammu and Kashmir

T + 91 191 2430447  
F + 91 191 2477469  
E-mail: bemldojammu@gmail.com

**Kothagudem**

Old Project Planning Department,  
Near SCCL Corporate Office,  
Kothagudem - 507 101, Telangana State

T + 91 8744 245572  
F + 91 8744 245530  
E-mail: bemlkgm@gmail.com

**LEH**

174-B, (Near Royal Enfield Showroom),  
Housing Colony, Leh, LADAKH-194101

T + 91 1982 258828  
E-mail: bemlleh@gmail.com

**Ramagundam**

Near SCCL TTC, Jawahar Nagar  
Godavarikhani - 505 209. Peddapalli Dist  
Telangana State

T + 91 8728 248299, 247423 / 26  
F + 91 8728 247423  
E-mail: bemlramagundam@gmail.com

**Udaipur**

20-B, Uchhab Bhawan, Bedia Road,  
New Fatehpura, Udaipur - 313 001.  
Rajasthan

T + 91 294 2452053, 2452055  
F + 91 294 2452054  
E-mail: mwu@beml.co.in

**Vijayawada**

No 48-13-1C, G Floor, Ramchandra Nagar,  
Near Ayush Hospital, Vijayawada -520 008

T / F + 91 866 2975499  
E-mail: bemlbza@gmail.com

**www.bemlindia.in**

Represented by :

--	--

बी ई एम एल लिमिटेड

**BEML LIMITED**

A Govt. of India Miniratna Company Under Ministry of Defence